

Contents:

1. Contents / Feature
2. Precautions
3. Important safety instructions
4. Introduction:
5. connection of subwoofer to the satellite speakers and the center speaker (see figure A)
6. Connections with the common stereo sound card and other audio sources:
7. connection to DVD player. (See figure B)
8. SUBWOOFER: See figure D
9. Specifications
10. Guarantee

Check the following product contents:

Subwoofer:	1pc
Satellites speakers:	5pcs
User manual:	1pc
cable	1pc
Cable RCA	3pcs
Cables Speakers:	5pcs

Precautions



CAUTION: To reduce the risk of electric shock, do not remove the cover or back. Refer servicing to qualified service personnel.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

The apparatus should not be exposed to dripping or splashing area. No objects filled with liquids, such as vases, should be placed on the apparatus.

Important safety instructions

READ INSTRUCTIONS-ALL safety and operating instructions should be read before the amplified speaker system is operated.

RETAIN INSTRUCTIONS-The safety and operation instructions should be retained for future reference.

HEED WARNING-ALL warnings on the speakers and in the operating instructions should be adhered to.

FOLLOW INSTRUCTIONS-ALL operating and use instructions should be followed.

WATER AND MOISTURE-The unit should not be used near water-for example, near a bathtub, washbowl, kitchen sink, laundry tub; in a wet basement, or near a swimming pool: and the like.

VENTILATION-Slots and openings in the cabinet are provided for ventilation and to ensure reliable operation of the speakers and to prevent it from overheating. These slots must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug or othersimilar surfaces. The unit should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided.

HEAT-This unit should be situated away from heat sources such as radiators, heat registers, stoves or other units (including amplifiers) that produce heat.

POWER SOURCES-The unit should be connected to a power supply only of the type described in the operating instructions or marked on the unit.

POWER CORD PROTECTION-power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the unit.

POLARIZATION-The unit may be equipped with a polarized alternating current line plug (a plug having one blade wider than the other). This is a safety feature. Do not defeat the safety purpose of the polarized plug.

CLEANING-Unplug the unit from the wall outlet or other power sources before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.


NON-USE PERIODS-The power cord of the unit should be unplugged from the outlet when left unused for a long period of time.

OBJECTS OF LIQUID ENTRY-care should be taken so the objects do not fall and liquids are not spilled on the unit.

DAMAGE REQUIRING SERVICE-The unit should be serviced by qualified service personnel when:

- a> The power supply cord or the plug has been damaged ;or
- b> Objects have fallen ,or liquid has been spilled into the unit ;or
- c> If the unit has been exposed to rain or water ;or
- d> If the unit does not appear to operate normally or exhibits a marked change in performance; or
- e> If the unit has been dropped, or the enclosure is damaged.

CARTS AND STANDS-The unit should be used only with a cart or stand that is recommended by the manufacturer.

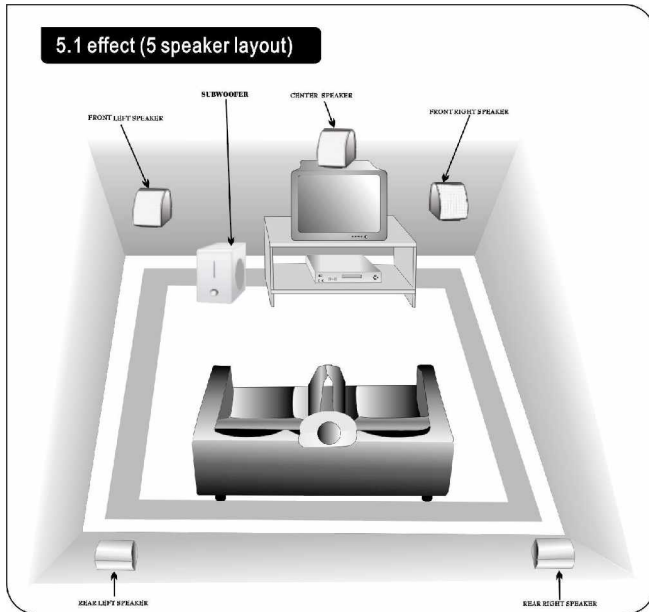

Introduction:

5.1 Channel home theater system a technologically advanced amplified speaker system featuring 5.1 channel output and digital volume controls.

This unit is comprised of four mini magnetically shielded satellite speakers, one mini magnetically shielded center speaker and one wooden subwoofer case. It is compatible with DVD player that have DOLBY DIGITAL (AC3) output, 5.1 channel sound card decoder which has front output, rear output and center/subwoofer output (ie. AC-3 soundcard). By this way, it can deliver rich dolby surround sound effect .It is also compatible with 4.1 channel soundcard decoder, common stereo sound

card and any other audio sources with stereo output to imitate 6-channel surround effect .All these features will make it very convenient for you to choose from a variety of audio sources and enjoy its rich sound effect.

Connections:

*To prevent malfunction or damage to the speaker or other devices, always turn down the volume and turn off the power before making any connections and read the instruction carefully before operating this unit.

connection of subwoofer to the satellite speakers and the center speaker (see figure A)

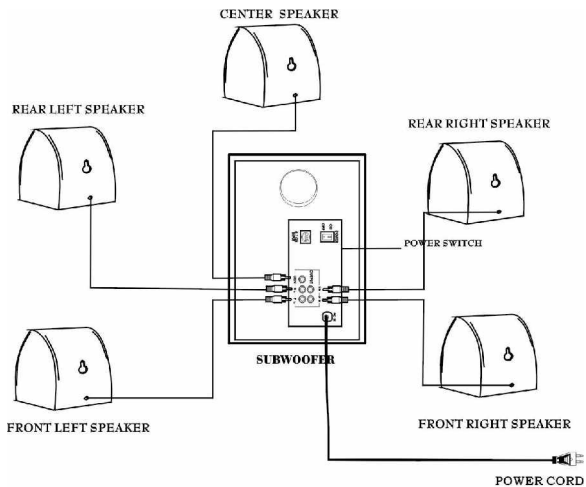


Figure A

1. Connect the front left satellite & front right satellite to the “FL” and “FR” terminals.
User Manual Voizze™ 150 6/10
Ref: 04042005

“FR” terminal of the subwoofer with the 2meter speaker cables.

2. Connect the rear left & rear right &“SR”satellite to the“SL” terminal of the subwoofer with the 5meter speaker cables.

3 connect the 2 meter center speaker cable to the “CEN” output terminal of subwoofer .

Connections with the common stereo sound card and other audio sources:

Connections to CD/VCD/MP3 player/TV and all stereo audio sources.
Turn off the DVD player. (see figure C)

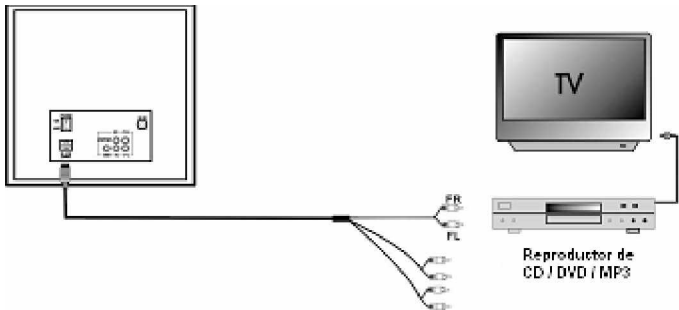


Figura C

connection to DVD player. (See figure B)


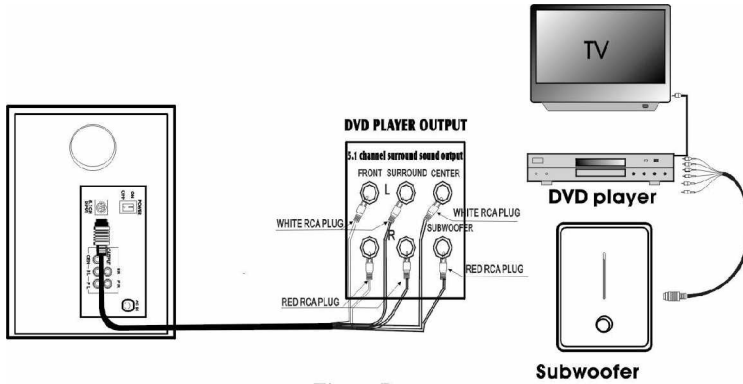


Figure B

SUBWOOFER: See figure D

BACK



FRONT




Figure D

Specification:

1. Output Power : 30 W.
2. Impedance: 4 Ohm.
3. Frequency response: 30Hz~20kHz
4. Total harmonic distortion < 0.5%
5. Input impedance > 10 K Ω
6. Power: 230V-240 V 50/60Hz
7. Dimension (H \times W \times D) :
 - ü Subwoofer speaker 160 X 230 X 260 mm
 - ü Front speakers 90 X 100 X 90 mm
 - ü Centre speaker 90 X 100 X 90 mm

Wuarranty

If you have any doubt concerning your product's operating mode, we recommend you to look inside the FAQ section or the additionnal documentation that is in the product's page.

Warranty Authenticity

Soyntec ensure that their product never present imperfection , including design or hability during the product purchase. Soyntec provides 36 month of warranty in all its products, except for the Electrical Power Protections that have 60 month.

UPS guarantee is valid for a period of 36 months from the date of your purchase. (Soyntec guarantees that the battery for the UPS will not fail for a period of 24 months from the date of your purchase).

Valid Warranty.

Please go back to your sales Point showing your receipt or voucher.

All requests for assistance are treated with the same courtesy and commitment to customer satisfaction.

Please contact us sending an e-mail to: support@soyntec.com

For UPS you can contact in our Hot line 902 294 294 where will let you know the steps to follow.